


# ST Series Relay Sockets

- Description** 8 and 11 Pin Square Base Sockets, DIN Rail Mountable
- Electrical Rating** • 300 Volts, 15 Amps
- Construction**
- Contacts** • Brass, Nickel Plated
  - Screws** • Binder Head, 6 - 32 x 1/4" Steel, Zinc Plated  
• Pressure Clamp, 6 - 32 x 5/16" Steel, Zinc Plated, Wire Range #12 - #20 Solid or Stranded
  - Molding** • Break Resistant Thermoplastic Black Standard, Grey Available

- Agency Approvals**
- UL recognized, File No. E60008
  - CSA certified, File No. LR29513
  - CE
  - ROHS

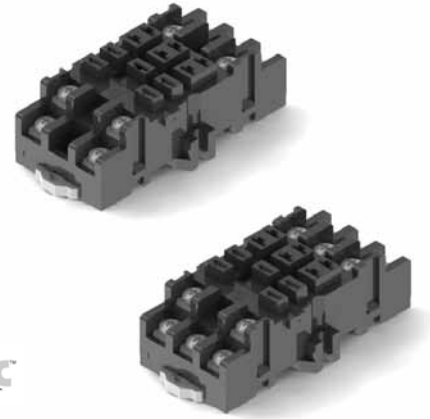



## ST Series Ordering Code

Part #	Description	Terminal Type
ST08	DPDT, 8 Pin Blade	Binder Head Screws
ST08-PC	DPDT, 8 Pin Blade	Pressure Clamp Screws
ST11	3PDT, 11 Pin Blade	Binder Head Screws
ST11-PC	3PDT, 11 Pin Blade	Pressure Clamp Screws

## Accessories

Part #	Description
(Refer to the accessories pages 24-31)	
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
HDB-8	Hold Down Spring

### TERMINAL LOCATIONS

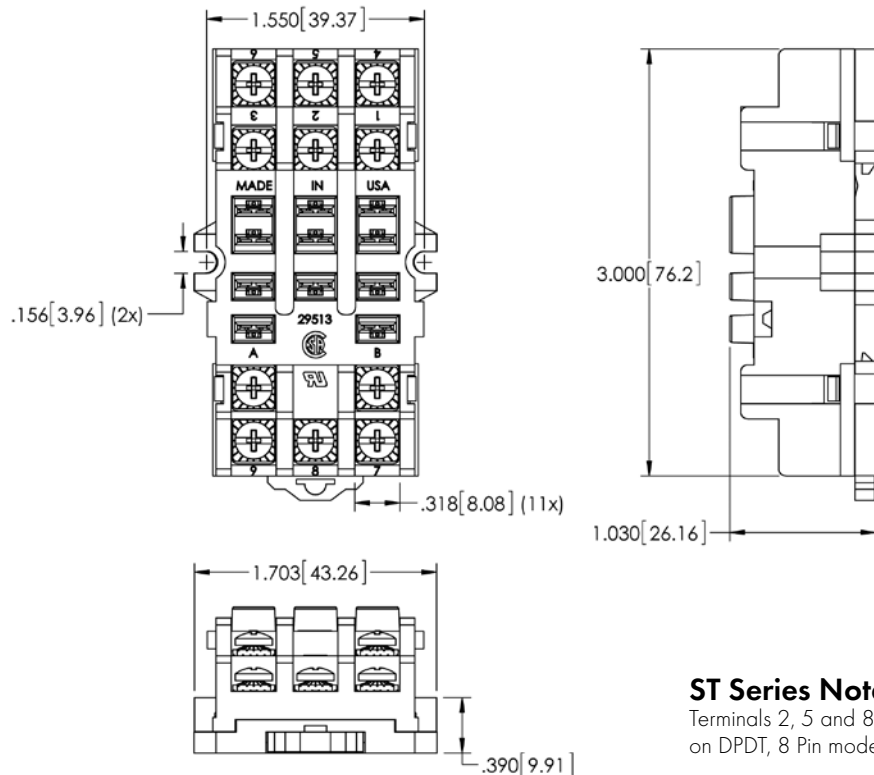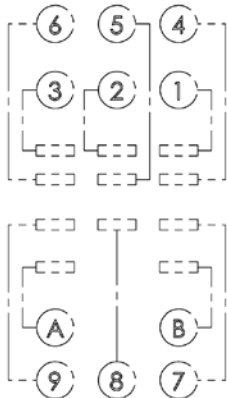

### ST Series Note:

Terminals 2, 5 and 8 omitted on DPDT, 8 Pin models