


- Description** Pre-Wired Automotive Relay Harness Assemblies
- Construction**
- Molding** • Heat Stabilized Thermoplastic, 140 degrees C Continuous Use Temperature Rating
  - Terminals** • Brass, Tin Plated
  - Wire Seals/Gaskets** • (WP Models Only), High Temperature Silicone Rubber
  - Wire** • GXL Insulated
- Agency Approvals** • ROHS

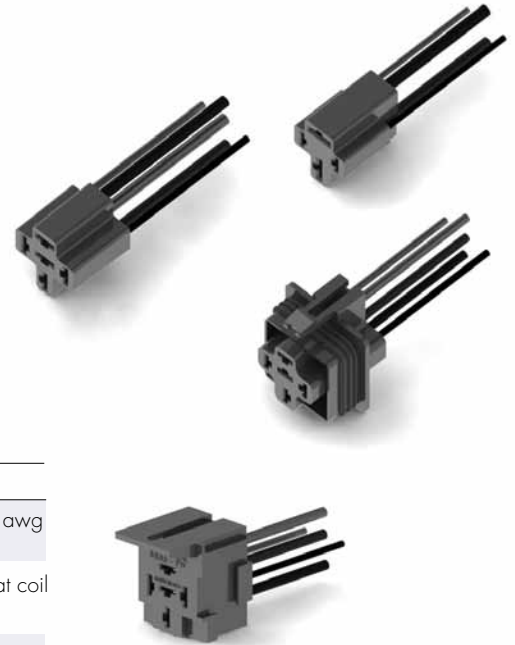

**PW Series Ordering Code**

Part #	Description
PW-BR05-FW-00004	SPDT, 12" wire leads, 14 awg at load contacts 30, 87 and 87a, 18 awg at coil contacts 85 and 86. See BR05-FW connector - page 33.
PW-BR05-FW-00005	SPST, 12" wire leads, 14 awg at load contacts 30 and 87, 18 awg at coil contacts 85 and 86. See BR05-FW connector - page 33.
PW-BR05-WH-00004	SPDT, 12" wire leads, 14 awg at load contacts 30, 87 and 87a, 18 awg at coil contacts 85 and 86. See BR05-WH connector - page 33.
PW-BR05-WH-00005	SPST, 12" wire leads, 14 awg at load contacts 30 and 87, 18awg at coil contacts 85 and 86. See BR05-WH connector - page 33.
PW-BR05-WP-00004	SPDT, 12" wire leads, 14 awg at load contacts 30, 87 and 87a, 18awg at coil contacts 85 and 86. See BR05-WP connector - page 34.
PW-BR05-WP-00005	SPST, 12" wire leads, 14 awg at load contacts 30 and 87, 87a sealed, 18 awg at coil contacts 85 and 86. See BR05-WP connector - page 34.
PW-PR05-WH-00004	SPDT, 12" wire leads, 10 awg at load contacts 30, 87 and 87a, 18 awg at coil contacts 85 and 86. See PR05-WH connector - page 36.
PW-PR04-WH-00005	SPST, 12" wire leads, 10 awg at load contacts 30 and 87, 18 awg at coil contacts 85 and 86. See PR04-WH connector - page 36.