


## Catalog Number Code

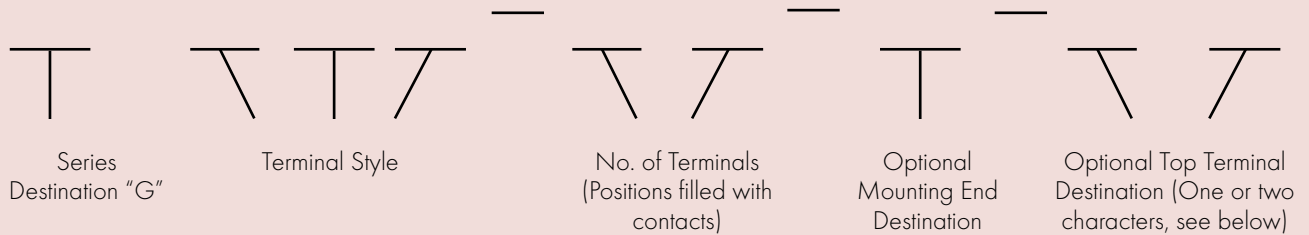

**PCB** = Printed Circuit Board  
**WWS** = Wire Wrap

**Terminal Styles**  
**QDC** = Quick Disconnect  
**TSC** = Non Feed Through

**SLD** = Solder

**Number of Terminals**  
02-30; 01-28 when ordered with M, P or T mounting

**Optional Mounting End Designation**  
(Omit if not desired)

**M** = One open position on each end of block for mounting  
**P** = One open position with a mounting plate on each end of block (.150 Dia. hole)  
**T** = One open position with a 6-32 tapped mounting plate on each end of block

**Optional Top Terminal Designation**

(Steel binder head screws standard; no designation required if this is the desired termination type)

**X** = No Screws

**PC** = Pressure Clamps

**B** = Brass Binder Head Screws

**A** = .250 x .031 Flat  
**C** = .250 x .031 45°  
**D** = .250 x .031 90°  
**E** = .250 x .031 Flat & 45°

**Quick Connects - Brass:**  
**F** = .250 x .031 Flat & 90°  
**G** = .250 x .031 45° & 90°  
**H** = .250 x .031 Flat, 45° & 90°

When brass binder head screws are desired to secure the above quick connects, precede the letter designation with "B", ie: BA.